

# PALLET TRUCKS & HANDTRUCKS

Manual handling solutions



Your distributor **MANITOU** :



MANITOU BF :  
Centre Logistique Pièces de Rechange  
Rond Point de la Butte de Tir - BP 249 - 44158 Ancenis Cedex - France  
Tél. : 00 33 (0)2 72 50 40 00 - Fax : France : 00 33 (0)2 72 52 40 37 - Fax Export : 00 33 (0)2 72 52 40 47  
[www.manitou.com](http://www.manitou.com)

**CE** This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 37,567,540 euros - 857 802 508 RCS Nantes





# Good reasons for choosing MANITOU!

## A full range

You benefit from the manual handling solutions best suited to your activity (transport, industry, construction, agriculture etc). Equipped with extremely strong chassis and forks, our products are designed to work under the most demanding conditions.

## Extremely easy to use

Improved ergonomics, safety and productivity. All our products will meet the requirements of your daily activity and provide a high level of user comfort and manoeuvrability.

## > Essential pallet truck!

# Standard pallet truck

The widest possible range of uses!  
Extremely strong and easy to manoeuvre, it's the market's "must have" pallet truck.



### Standard model with ergonomic towing bar



- > Easier to handle thanks to an ergonomic handle with a non-slip/cold-resistant coating.
- > Simplified lifting and handling thanks to its 250 kg capacity hydraulic quick-lift system.
- > Simplified pallet handling thanks to the entry and exit rollers.

### Standard model with park brake

Ideal for use when lowering



### Standard model with steel towing bar

Even stronger

#### TECHNICAL CHARACTERISTICS STANDARD

Description	Product code	Capacity	Fork length	Overall width	Fork height Min/Max	Weight	Rollers	Wheels
Rubber single Roller	787353	2500 kg	1150 mm	540 mm	85/200 mm	70 kg	Polyurethane x2	Rubber x2
Rubber tandem roller	787352	2500 kg	1150 mm	540 mm	85/200 mm	72 kg	Polyurethane x4	Rubber x2
Steel towing bar tandem roller	894423	2500 kg	1150 mm	540 mm	85/200 mm	65 kg	Polyurethane x4	Rubber x2
Nylon single Roller	787355	2500 kg	1150 mm	540 mm	85/200 mm	64 kg	Nylon x2	Nylon x2
Nylon tandem roller	787354	2500 kg	1150 mm	540 mm	85/200 mm	66 kg	Nylon x4	Nylon x2
Handbrake - Tandem roller	787356	2500 kg	1150 mm	540 mm	85/200 mm	73 kg	Polyurethane x4	Rubber x2



## Long forks




Specially designed for transporting long and non-standard pallets.



## Low forks

Essential for handling low loads.

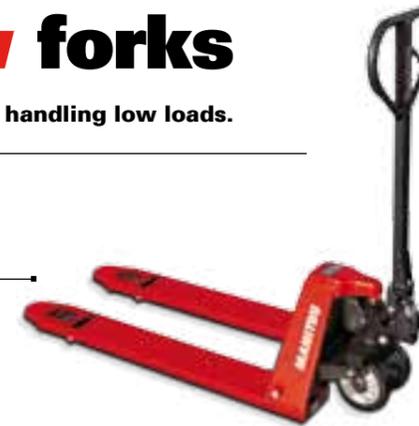

> Height of forks in lowered position 51 mm.



Ideal for handling in confined spaces (trucks, markets, paper mills, lifts etc.).

> Compact, highly-maneuvrable model equipped with short reinforced forks for handling small pallets.



## Short forks



Perfect for handling large pallets

## Wide forks



## High lift pallet truck

This ultra-ergonomic pallet truck adapts to the layout of workstations and allows the load to be levelled at the desired height.

- > Optimum operator working comfort with a raised position for facilitating loading and unloading of loads in total safety.
- > Automatic activation of stabilizers for stability and total safety for lifts in excess of 400mm.
- > No risk of leaks or loss of power with the self-contained actuator.



**Manual high lift**



**Electric high lift**

> Electric model, comfortable to use thanks to lifting assisted by a 70AH/12V battery and a 6A/12V charger.

### TECHNICAL CHARACTERISTICS


Description	Product code	Capacity	Fork length	Overall width	Fork height Min/Max	Weight	Rollers	Wheels
<b>Long forks</b>								
1800 mm - Tandem roller	787363	1500 kg	1800 mm	540 mm	85/200 mm	81 kg	Polyurethane x4	Rubber x2
1500 mm - Tandem roller	787362	2000 kg	1500 mm	540 mm	85/200 mm	88 kg	Polyurethane x4	Rubber x2
<b>Short forks</b>								
Single Roller	787361	2500 kg	800 mm	540 mm	85/200 mm	65 kg	Polyurethane x2	Rubber x2
Tandem roller	787360	2500 kg	800 mm	540 mm	85/200 mm	67 kg	Polyurethane x4	Rubber x2
Short & Narrow - Tandem roller	787359	2000 kg	800 mm	450 mm	85/200 mm	65 kg	Polyurethane x4	Rubber x2
900 mm - Tandem roller	787357	2500 kg	900 mm	540 mm	85/200 mm	69 kg	Polyurethane x4	Rubber x2
<b>Wide forks</b>								
Single Roller	787368	2500 kg	1150 mm	685 mm	85/200 mm	72 kg	Polyurethane x2	Rubber x2
Tandem roller	787367	2500 kg	1150 mm	685 mm	85/200 mm	75 kg	Polyurethane x4	Rubber x2
<b>Low forks</b>								
Tandem roller	787358	2000 kg	1150 mm	540 mm	51/165 mm	71 kg	Polyurethane x4	Rubber x2
<b>High lift pallet truck</b>								
Manual	720269	1000 kg	1190 mm	560 mm	85/800 mm	128 kg	Polyurethane x2	Polyurethane x2
Large (680 mm) - manual	745112	1000 kg	1190 mm	680 mm	85/800 mm	133 kg	Polyurethane x2	Polyurethane x2
Electric	720270	1000 kg	1190 mm	560 mm	85/800 mm	159 kg	Polyurethane x2	Polyurethane x2
Large (680 mm) - electric	745183	1000 kg	1190 mm	680 mm	85/800 mm	164 kg	Polyurethane x2	Polyurethane x2



## Stainless steel pallet truck

Specially designed for environments with strict health requirements and corrosive or very damp environments (pharmaceutical sector, chemicals, agri-food, fisheries etc.).

- > Optimum resistance to high temperatures and to chlorine and fluorine laden and marine environments thanks to a structure made entirely from type 316 stainless steel.
- > Usage temperature -40° to +40°.
- > Closed forks for a better hygiene
- > Lubrication and increased life thanks to the self-lubricating rings on the bogies.
- > Resistance to external agents, high pressure washes and detergents.

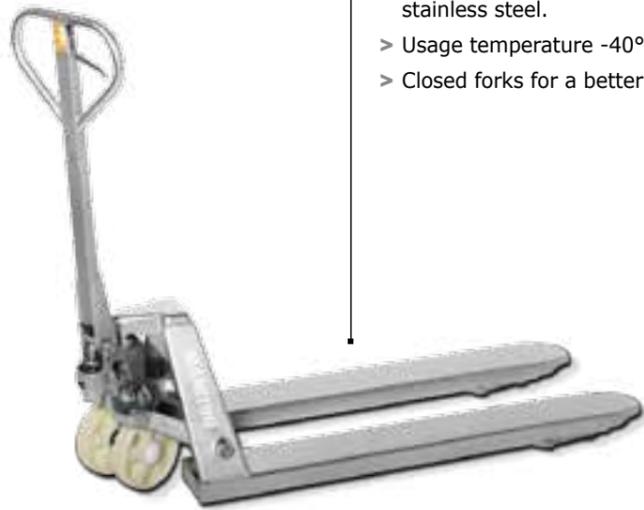

## Galvanized pallet truck

Recommended for harsh, damp environments (agri-food, fishing industry etc.)

- > Totally galvanized structure (fork carrier, pump, handle and forks) for improved strength.

### TECHNICAL CHARACTERISTICS

Description	Product code	Capacity	Fork length	Overall width	Fork height Min/Max	Weight	Rollers	Wheels
<b>Stainless steel pallet truck</b>								
Tandem roller	787366	2000 kg	1150 mm	540 mm	85/200 mm	71 kg	Nylon x4	Nylon x2
<b>Galvanized pallet truck</b>								
Tandem roller	787364	2000 kg	1150 mm	540 mm	85/200 mm	71 kg	Polyurethane x4	Rubber x2
Tandem roller	787365	2000 kg	1150 mm	540 mm	85/200 mm	71 kg	Nylon x4	Nylon x2

## Weighing pallet truck

Essential for informing you quickly and easily of the weight of your loads when consigning or receiving them.



- > Accuracy: 1kg/2T – with 1 kg graduations; display accuracy 0.1%.
- > Easy to use: LCD screen, 18 mm digits, reset, tare and weight totalizing.
- > LED battery charge state and paper level indicator.
- > Battery endurance 100 hrs.
- > Usage temperature -10°C to +40°C.
- > IP65 case protected against dust and water spray.

### TECHNICAL CHARACTERISTICS

Description	Product code	Capacity	Fork length	Overall width	Fork height Min/Max	Weight	Rollers	Wheels
<b>Weighing pallet truck</b>								
Without printer	744759	2000 kg	1150 mm	555 mm	85/205 mm	117 kg	Polyurethane x4	Rubber x2
With printer	744760	2000 kg	1150 mm	555 mm	85/205 mm	118 kg	Polyurethane x4	Rubber x2

## Practical, lightweight strong trolleys!

### ▶ Light, folding mini hand truck

Ergonomic and easy to handle. Fully foldable and takes up little space; it can be easily housed inside a vehicle. Aluminium model.

- Dimensions:
- > unfolded: 410 x 400 x 1100 mm.
  - > folded: 200 x 400 x 750 mm.
  - > Max load: 90 kg.
  - > Solid wheels: Ø 150 mm.



720468

### ▶ Dual purpose hand truck

Dual-purpose: truck and trolley. Very easy to handle, using the frame or the handles. Aluminium model.

- Dimensions:
- > As hand truck: 520 x 470 x 1310 mm.
  - > As trolley: 520 x 1190 x 1030 mm.
- Max load:
- > As hand truck: 200 kg.
  - > As trolley: 300 kg.
  - > Inflatable tyres: Ø 260 mm.



720441

### ▶ Heavy duty hand truck

Very strong thanks to its reinforced plate. Aluminium model.»

- > Dimensions: 420 x 510 x 1330 mm.
- > Max load: 300 kg.
- > Semi-inflatable tyres: Ø 250 mm.



720440

### ▶ Hand truck

The classic truck for everyday handling tasks. Standard model made from high strength steel.

- > Height: 1232 mm
- > Width: 536 mm
- > Max load: 250 kg



894215